



Pulsante Touch IR – IP68

Touch IR Button – IP68


Cod. PLIRRGB68

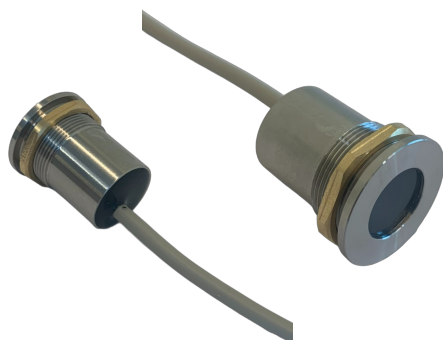

Dimensioni / Dimensions

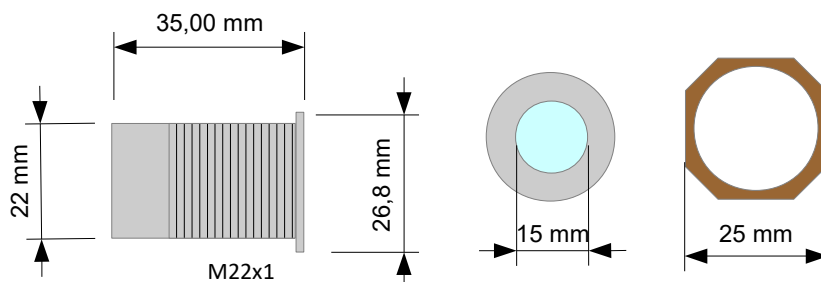


Schema elettrico interno Pulsante IR IP68 / Internal electrical diagram Button IR IP68

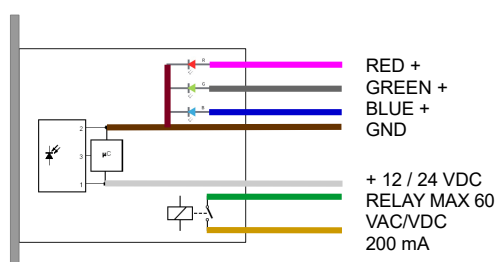

ROSA / PINK	RED +12 / 24 VDC
GRIGIO / GREY	GREEN +12 / 24 VDC
BLU / BLUE	BLU +12 / 24 VDC
BIANCO / WHITE	+12 / 24 VDC
MARRONE / BROWN	GND
VERDE / GREEN	
GIALLO / YELLOW	

Schema di collegamento Pulsante IR IP68 / Connection diagram Button IR IP68

ACTIVE
SIDE

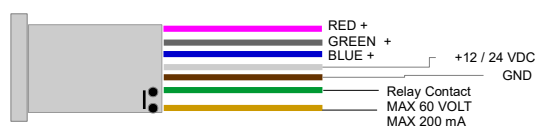

IT - Dati tecnici

Cassa

Corpo: Acciaio AISI 316

Anello fissaggio: Ottone nichelato

Vetrino: Polimetilmetacrilato opalino

Dati elettrici

Led: RGB

Volts: 12 / 24 Volts

Contatto Relay: max 60 Vdc 200 mA

Isolamento

Resina: Poliuretanica (PUR) - Grado di protezione: IP68

Cavo

Cavo: Unitronic LIYY 7x0.34 - Lunghezza standard: 1 mt

Potenza massima assorbita: 400mA

Precauzioni di utilizzo

Non tirare il cavo con forza.

Non flettere il cavo in corrispondenza del pulsante oltre i 90°

Evitare torsioni del cavo.

Installare a cura di personale qualificato.

Normative di sicurezza

Normative di riferimento EN 60730-1

Smaltire separatamente secondo le normative vigenti.

EN - Technical data

Case

Body: Stainless Steel AISI 316

Fixing Ring: Nickel brass

Glass: Polymethylmethacrylate opalin

Electric data

Led: RGB

Volts: 12 / 24 Volts

Relay contact: max 60 Vdc 200 mA

Protection rate

Resin: Polyurethane (PUR) - Protection rate: IP68

Cable

Cable: Unitronic LIYY 7x0.34 - Standard length: 1 mt

Power consumption: 400mA

Usage cautions

Do not pull the cable violently.

Do not flex the cable at the button beyond 90°

Avoid twisting the cable.

Install by qualified person.

Safety Standards


Standards reference EN 60730-1

Recycle separately according applicable regulations.

Touch IR – IP68 CONNECTIONS

**USARE UN ALIMENTATORE
DEDICATO**

**INDEPENDENT AND DEDICATED
POWER SUPPLY**

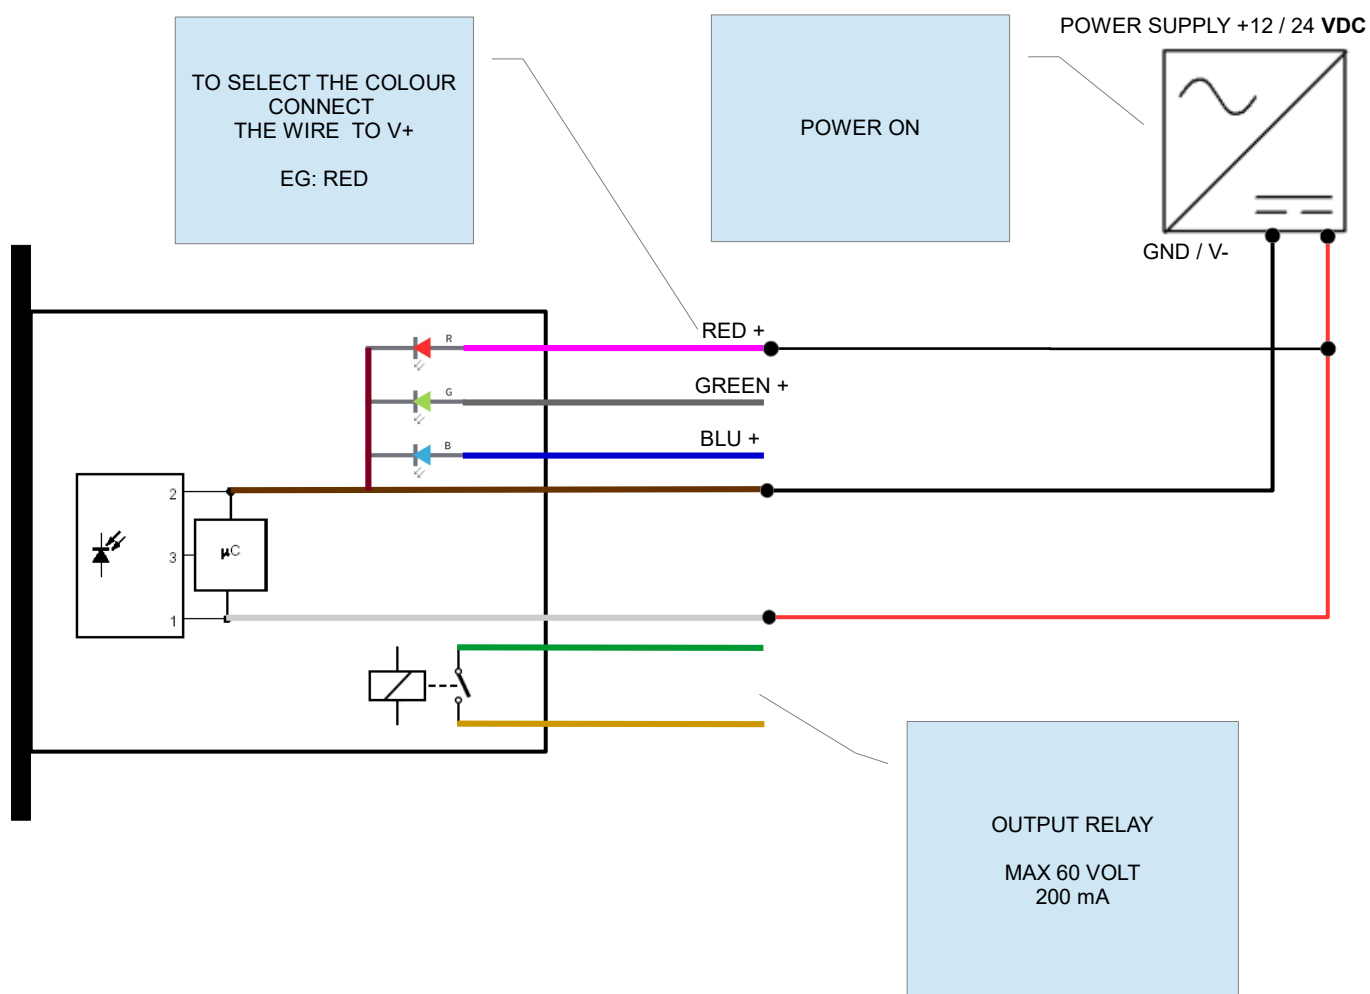


ROSA / PINK	RED +
GRIGIO / GREY	GREEN +
BLU / BLUE	BLU +
BIANCO / WHITE	+12 / 24 VDC
MARRONE / BROWN	GND / V-
VERDE / GREEN	
GIALLO / YELLOW	


NOTE:
*This is a Touch button not Touchless
Pulsante Touch non a sfioramento*

EXTERNAL RELAY CONNECTIONS

POWER SUPPLY +12 / 24 VDC

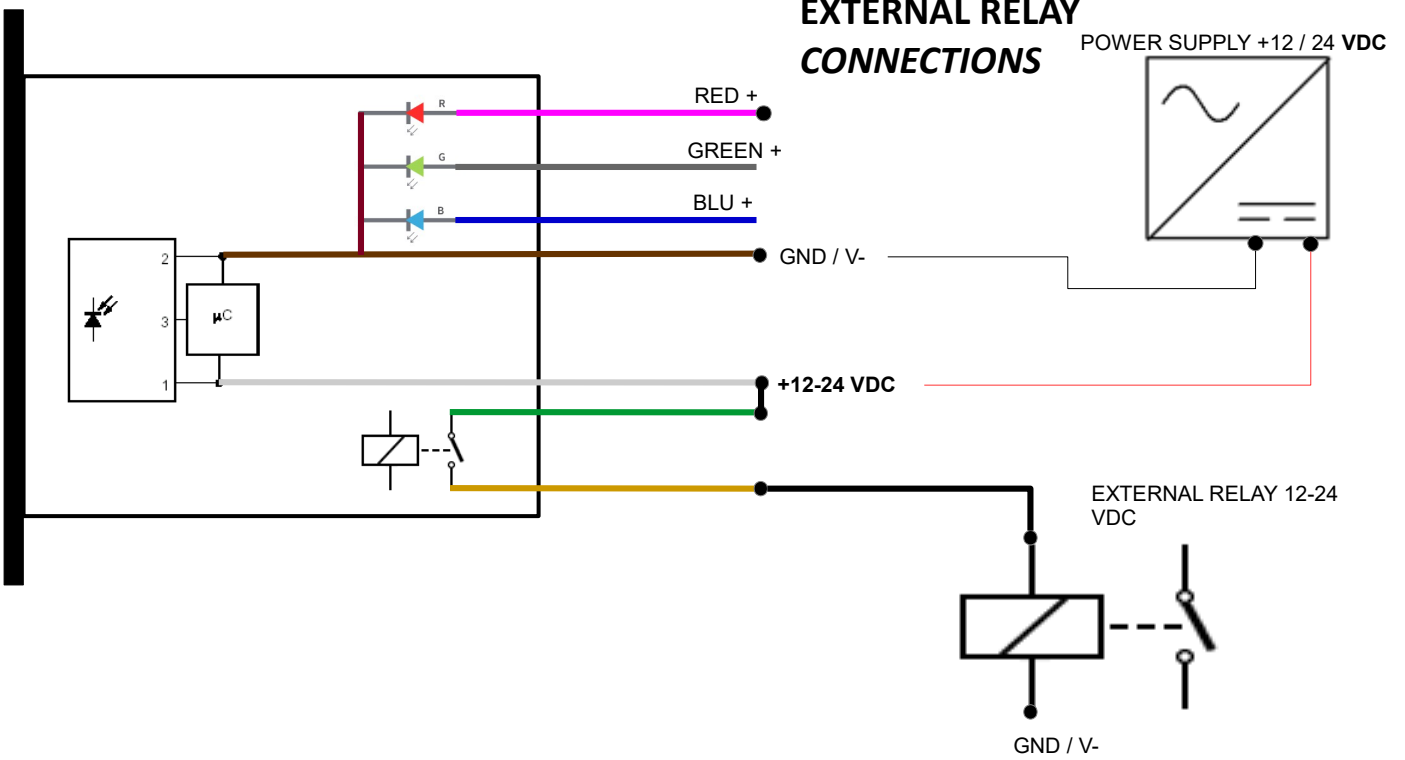


TI-PO 02 CONNECTIONS

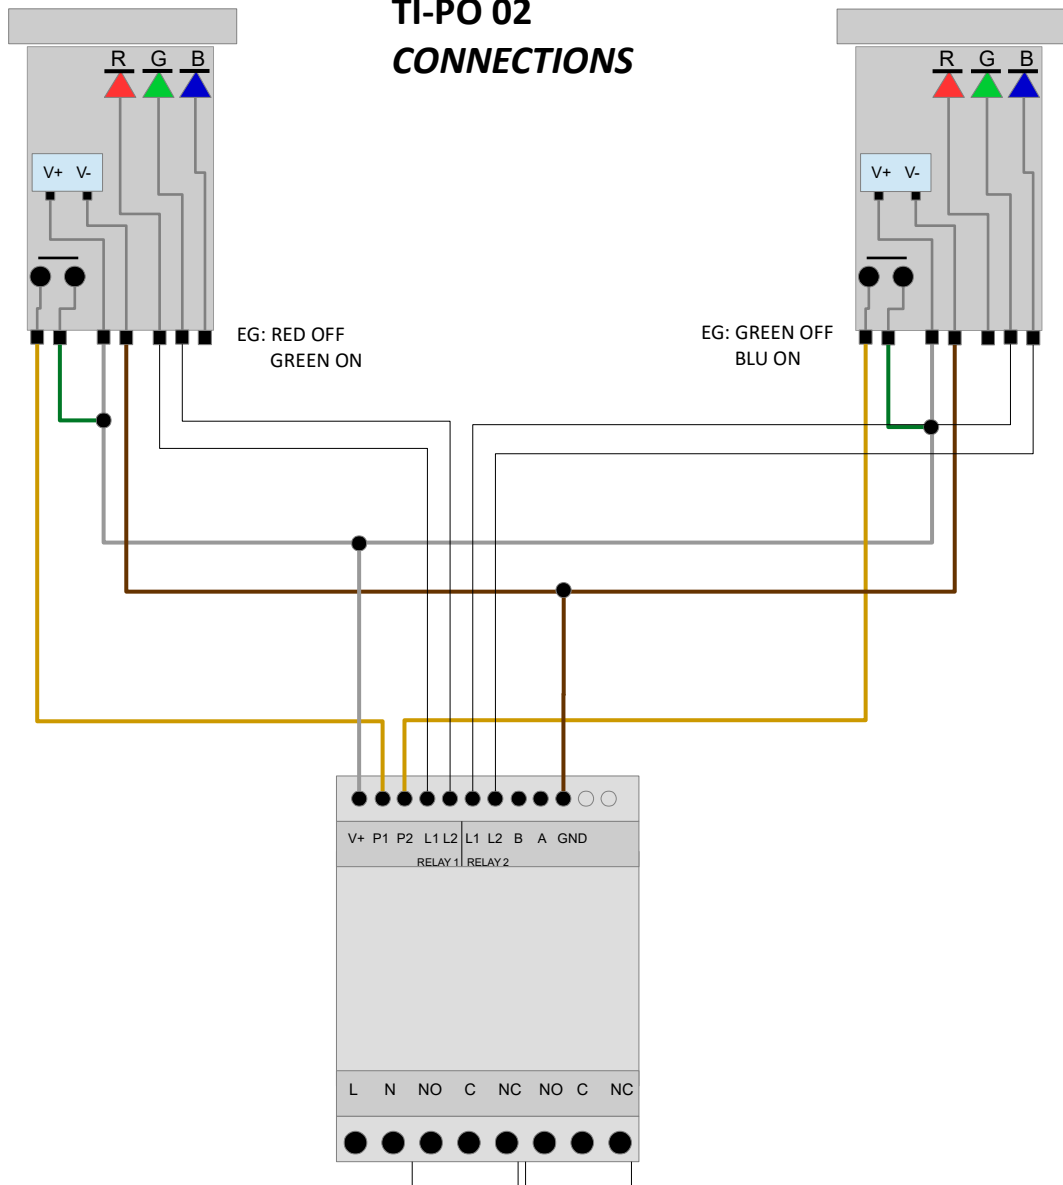


RELAY Connection

STEP 1

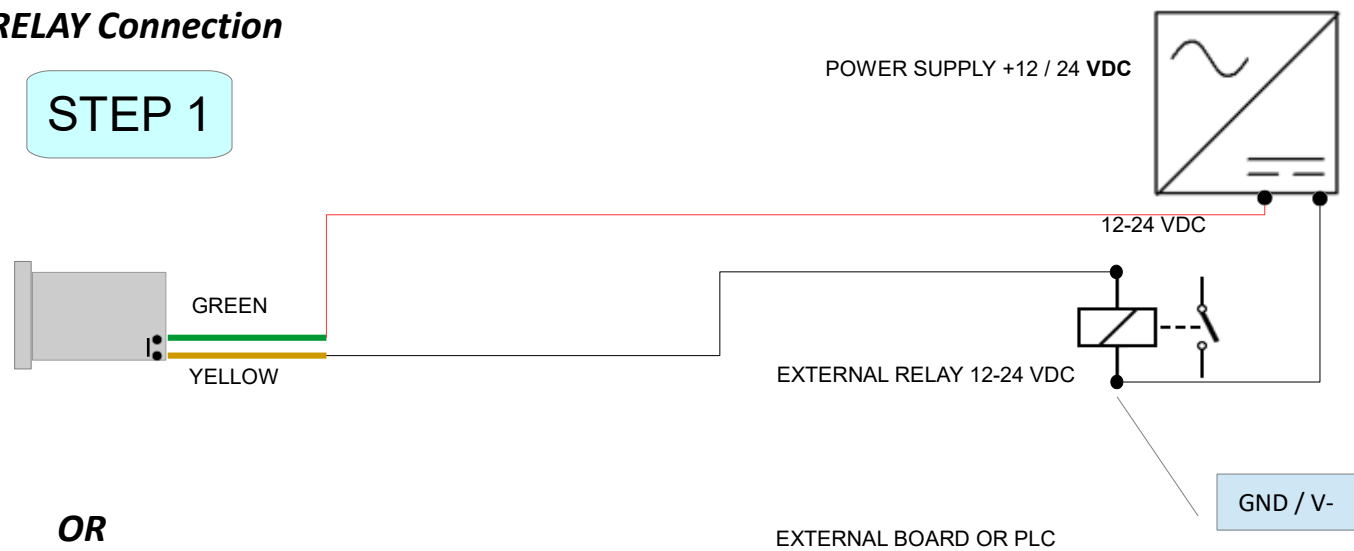


OR

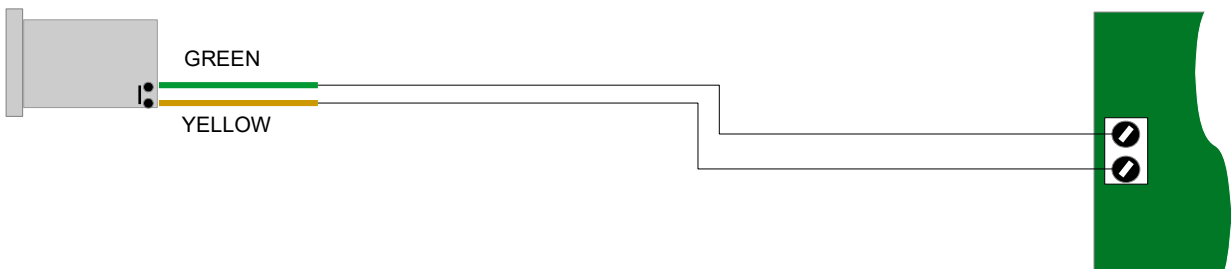

POWER

STEP 2

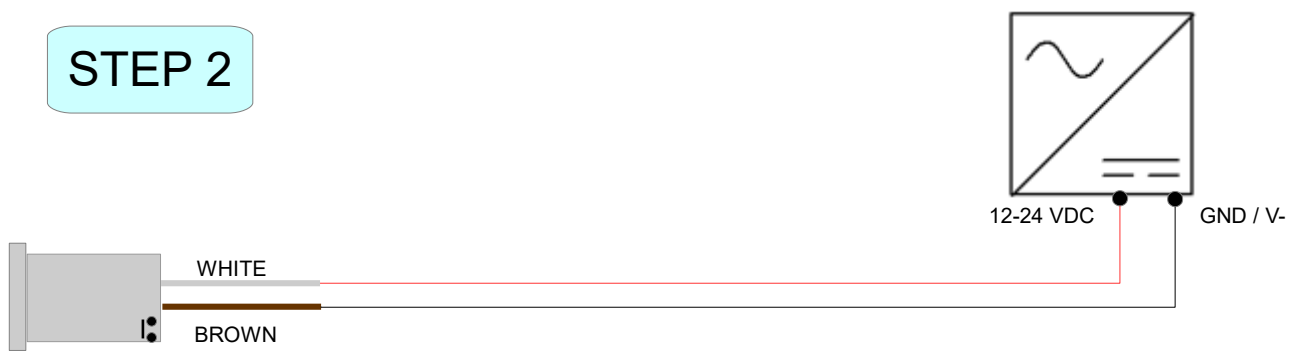

LEDS

STEP 3

